


RG 304

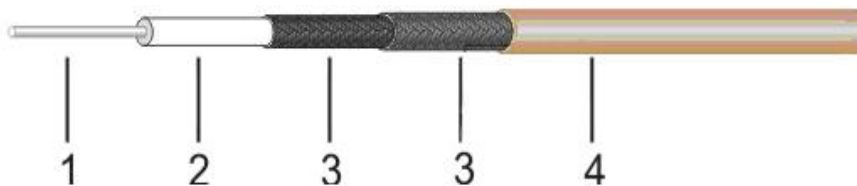

结构参数 Construction Specification

	材料 Material	直径 Diameter(mm)
1. 内导体 Inner Conductor	镀银铜包钢线 Silver Plated Copper Clad Steel	1.50
2. 绝缘体 Dielectric	聚四氟乙烯 PTFE	4.70
3. 外导体 Outer Conductor	双层镀银线编织 Double Silver Plated Copper Braid	5.70
4. 护套 Jacket	聚全氟乙丙烯 FEP	7.11

电性能参数 Electrical Characteristics

阻抗 Impedance(Ohm)	50
电容 Capacitance(pF/m)	96
速率 Velocity(%)	70
弯曲半径 Bending Radius(mm)	36
最大工作电压 Max.Oper. Voltage(VMS)	3000
最大工作频率 Max.Oper. Frequency (MHz)	12000
温度范围 Operating Temp. (°C)	-55—+200

衰减 Attenuation(Typical)

频率 Frequency(MHz)	衰减 Attenuation(dB/m)
100	0.082
400	0.174
1000	0.289
3000	0.551
5000	0.755